


Front view

Installation frame for master modules, switch cards, adapters and dummy plates

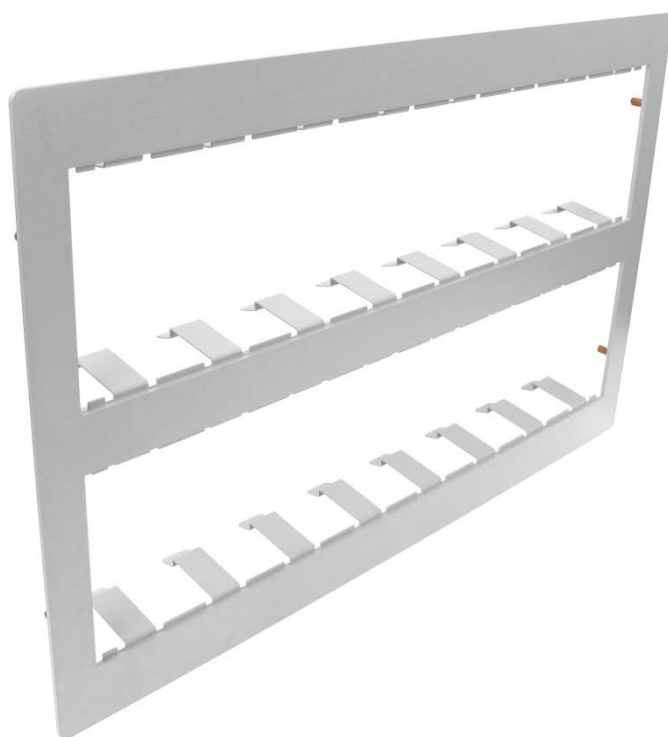

Types / installation forms

MGR131	Installation frame for 3 master modules, switch cards, adapters and dummy plates (WxHxD) 373,6 x 177 x 51mm, 12 spring holders
MGR141	Installation frame for 4 master modules, switch cards, adapters and dummy plates (WxHxD) 482,6 x 177 x 51mm, 16 spring holders
MGR231	Installation frame for 6 master modules, switch cards, adapters and dummy plates (WxHxD) 373,6 x 316,3 x 51mm, 24 spring holders
MGR241	Installation frame for 8 master modules, switch cards, adapters and dummy plates (WxHxD) 482,6 x 316,3 x 51mm, 32 spring holders

Dimensions of master modules, switch cards, blind plates and adapters


FRIGOLINK master module G3/G4	(WxHxD) 109 x 109 x 92mm, fastening of master module with 2 pairs of spring holders
Switch card SLDxxx-C	(WxHxD) 54,5 x 109 x 92mm, fastening of switch card with 1 pair of spring holders
Dummy plate BLM05	(WxHxD) 54,5 x 109 x 28mm, fastening of dummy plate with 1 pair of spring holders
CAN bus adapter, ZCB-ADP/MGR-BUS	(WxHxD) 54,5 x 109 x 43mm, fastening of CAN bus adapter with 1 pair of spring holders




Note!

- A torque wrench should be used for installation with a maximum force of 3Nm. Installation with a higher torque may result in damage to the mounting frame.


Installation section MGR131

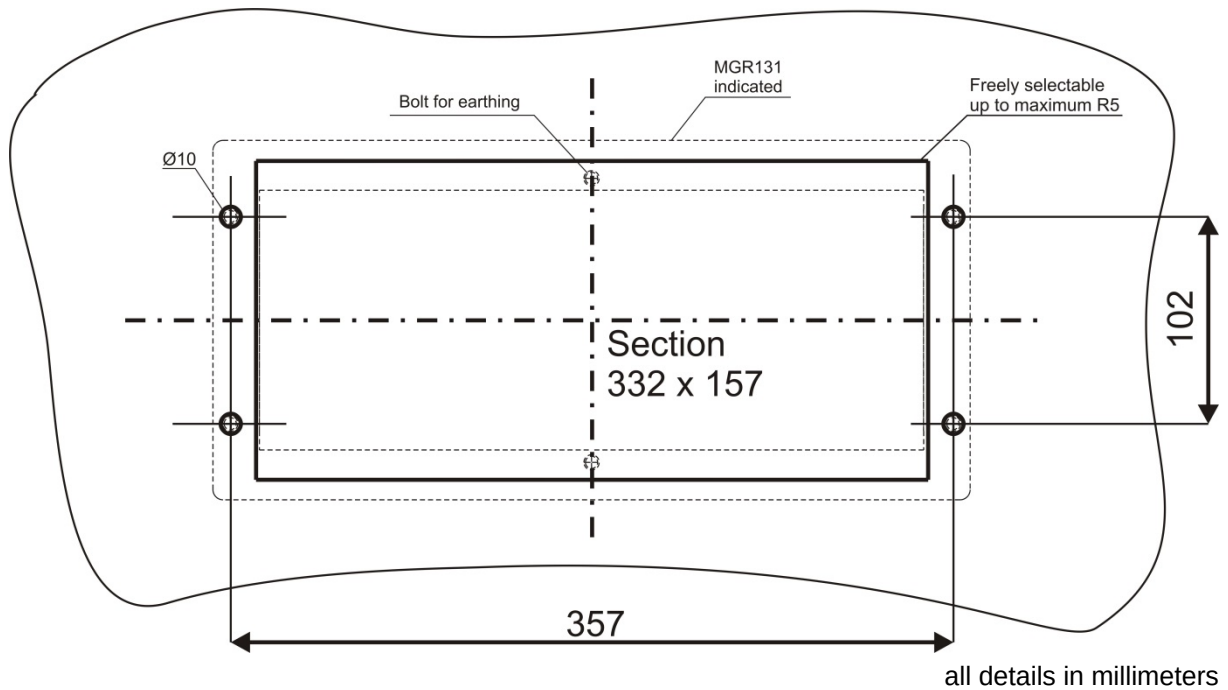

Installation section MGR141

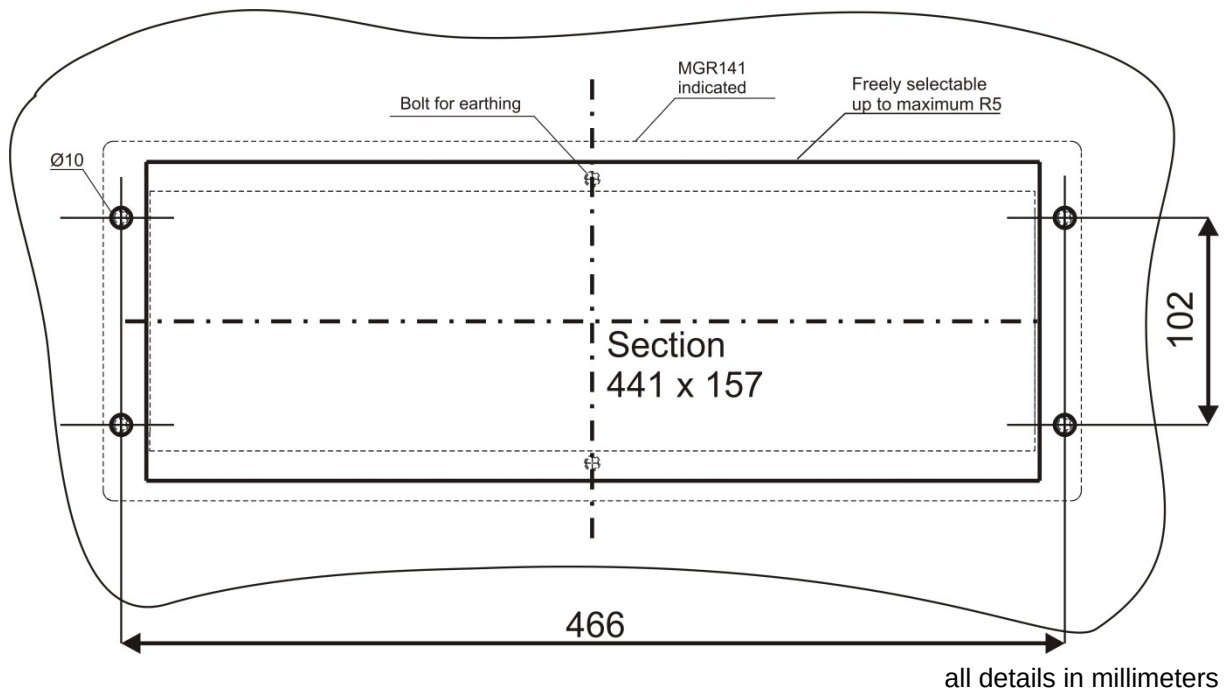


Installation section MGR231

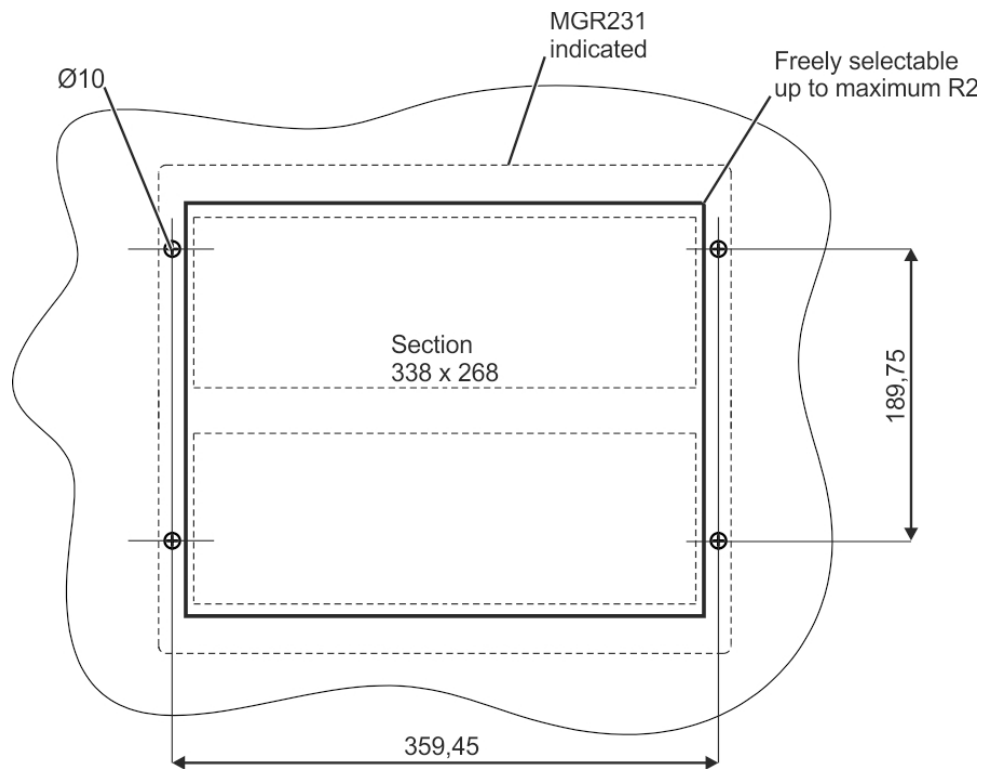

all details in millimeters

Installation section MGR241

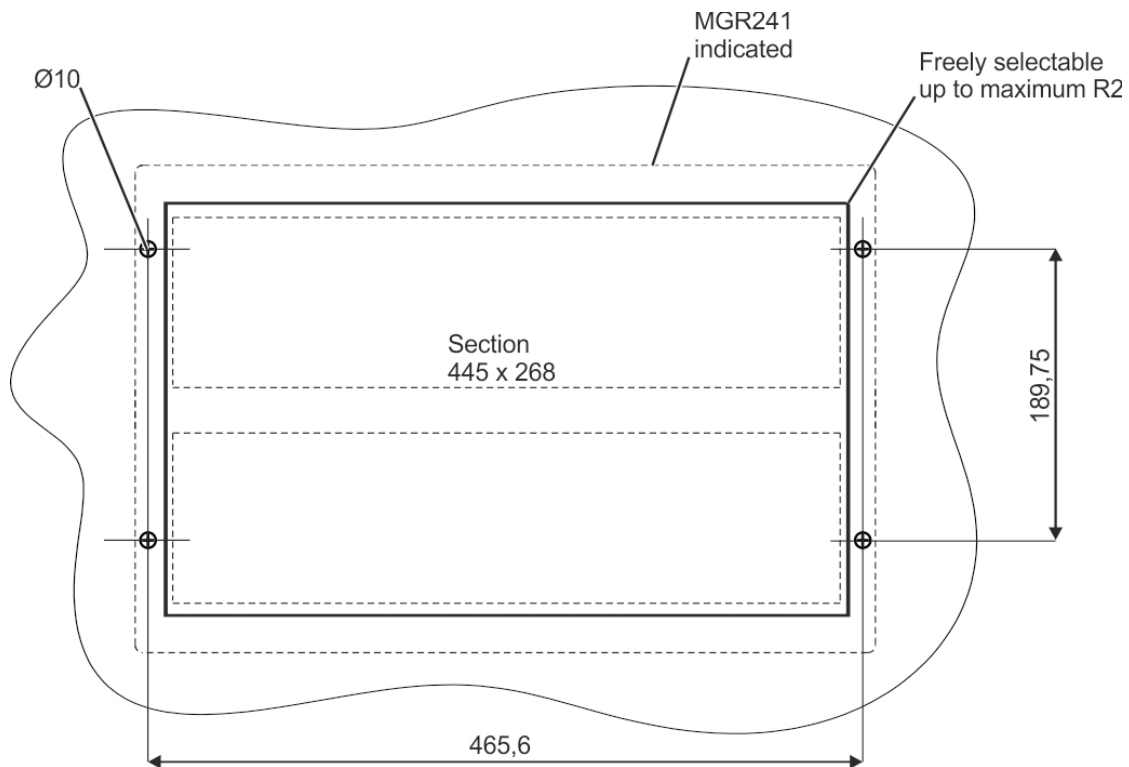

all details in millimeters