

1 MGR

Installation frame for master modules, switch cards, adapters and dummy plates

1.1 Front view



Fig. 1: Front view installation frame for up to 4 master modules, switch cards, adapters and dummy plates

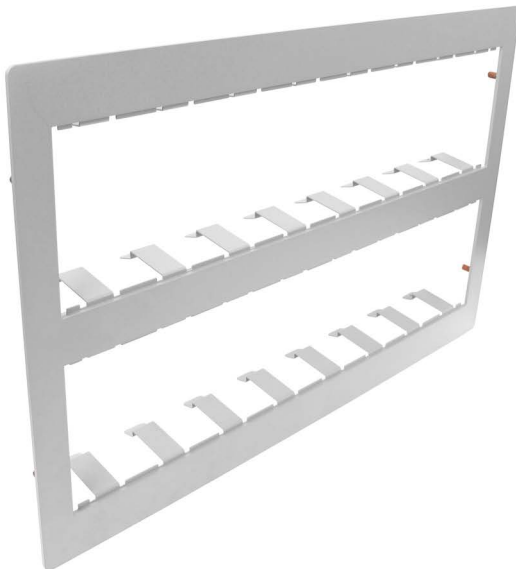


Fig. 2: Front view installation frame for up to 8 master modules, switch cards, adapters and dummy plates

1.2 Types / Models

MGR131	Installation frame for 3 master modules, switch cards, adapters and dummy plates 12 catch spring holders Dimensions: (W x H x D) 373.6 x 177 x 51mm
MGR141	Installation frame for 4 master modules, switch cards, adapters and dummy plates 16 catch spring holders Dimensions: (W x H x D) 482.6 x 177 x 51mm
MGR231	Installation frame for 6 master modules, switch cards, adapters and dummy plates 24 catch spring holders Dimensions: (W x H x D) 373.6 x 316.3 x 51mm
MGR241	Installation frame for 8 master modules, switch cards, adapters and dummy plates 32 catch spring holders Dimensions: (W x H x D) 482.6 x 316.3 x 51mm

1.3 Dimensions of master modules, switch cards, blind plates and adapters

FRIGOLINK-master module G3/G4	(W x H x D) 109 x 109 x 92mm master module fastened with 2 pairs of catch spring holders
Switch card SLDxxx-C	(W x H x D) 54.5 x 109 x 92mm switch card fastened with 1 pair of catch spring holders
CAN bus adapter ZCB-ADP/MGR-BUS	(W x H x D) 54.5 x 109 x 43mm CAN bus adapter fastened with 1 pair of catch spring holders
Dummy plate BLM05	(W x H x D) 54.5 x 109 x 28mm dummy plate fastened with 1 pair of catch spring holders

NOTICE



- Installation requires the use of a torque wrench with a maximum force of 3Nm. Installation with a higher torque may result in damage to the installation frame.



Wurm Infocenter



paperless info



Validity of the documentation

Date

2024-03

Documentation status

This document will automatically cease to be valid if a new technical description is issued.

Manufacturer: Wurm GmbH & Co. KG Elektronische Systeme, Morsbachtalstraße 30, D-42857 Remscheid. You can find more information on our website at www.wurm.de.

1.4 Installation sections

1.4.1 Installation section MGR131

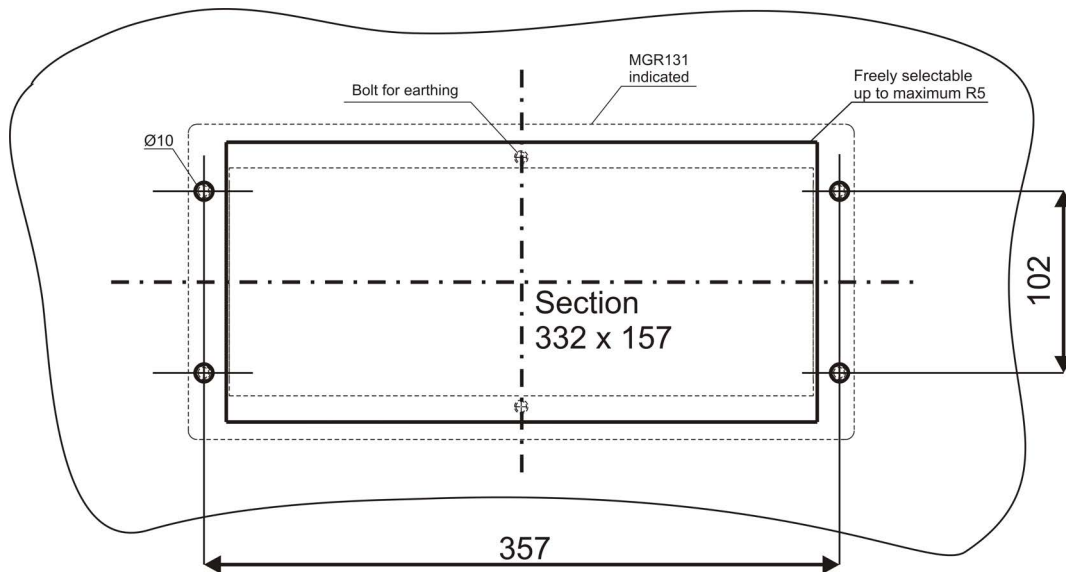


Fig. 3: Installation section MGR131 (all dimensions in mm)

1.4.2 Installation section MGR141

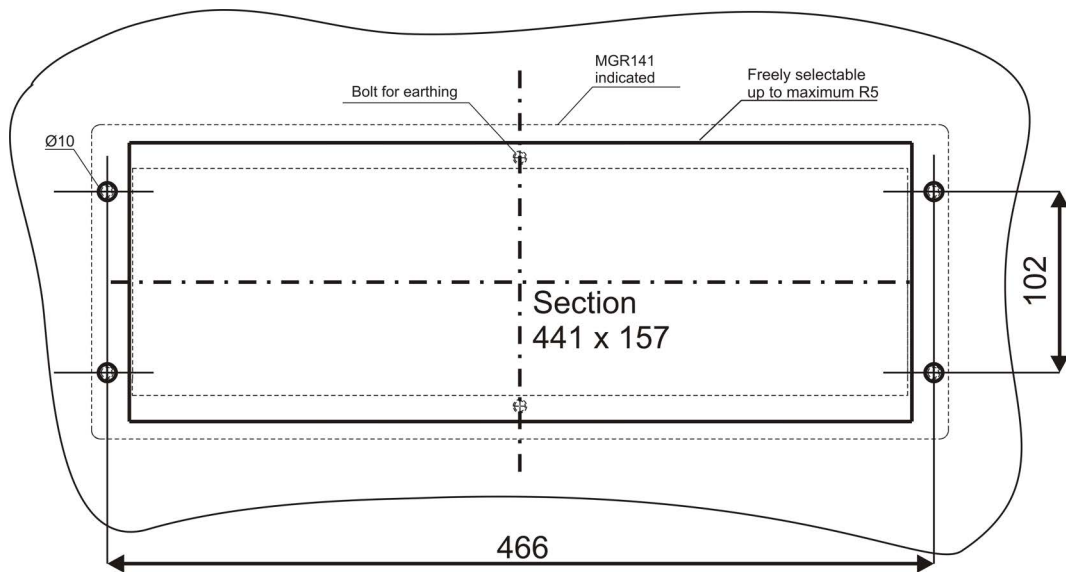


Fig. 4: Installation section MGR141 (all dimensions in mm)

1.4.3 Installation section MGR231

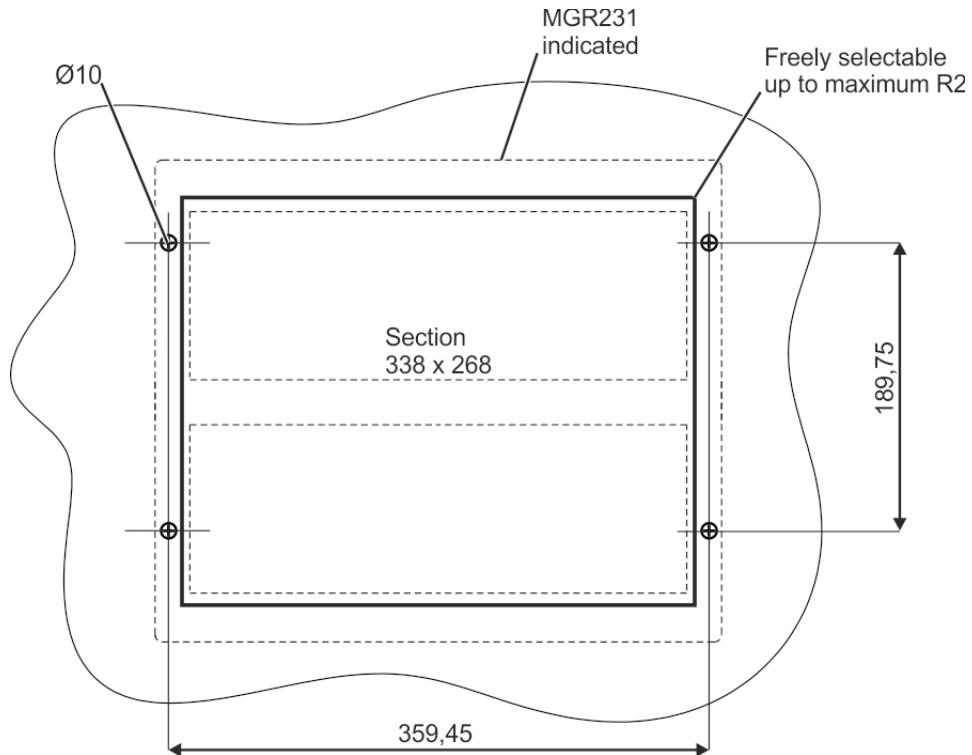


Fig. 5: Installation section MGR231 (all dimensions in mm)

1.4.4 Installation section MGR241

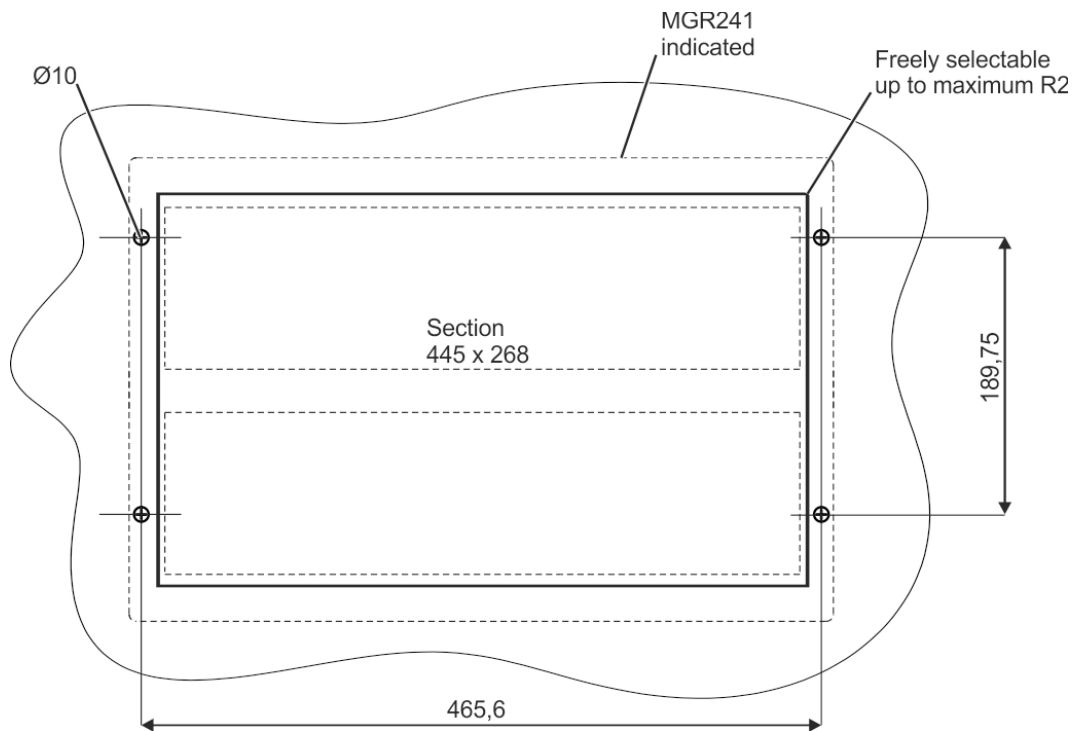


Fig. 6: Installation section MGR241 (all dimensions in mm)