


MOD-LAN-RS232

LAN MODEM FOR REMOTE DATA TRANSFER

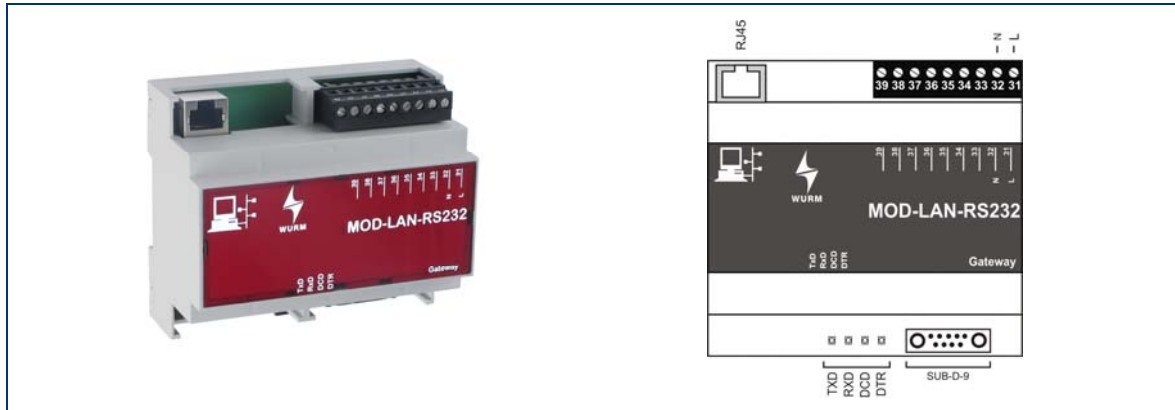

Features

- Only in combination with CMD200-E
- TCP/IP interface
- Can be parameterised using Frigodata XP
- Fixed IP address can be set

Technical data

Supply voltage	230V~, +10% / -15%, approx. 5VA
System interface	SUB-D-9 socket for connection to CMD200-E
Network connection	RJ45 socket, 10 MBit
Housing	Plastic
Dimensions	(WxHxD) 106 x 90 x 58mm, DIN 43880
Mounting	Mounting rail DIN EN 50022, 35 x 15
Ambient temperature	Operation: 0...+50°C, storage: -25...+70°C
Weight	About 450g
CE conformity	EC conformity according to - 2004/108/EC (EMC Directive)
	RoHS

Scope of supply

- Connecting cable SUB-D/SUB-D, 1.8m
- Connecting cable RJ45/RJ45, Cat5, blue, 2m